

Product:

Indoor Pipeline - PVC Self-Adhesive base, over laminated with clear BOPP

Typical Applications:

- Pipe Identification
- Indoor use


Advantages & Benefits:

- Adhesive bonds well to a wide variety of substrates including, Metals, High surface energy and Low surface energy plastics.
- Ideal for applications requiring high initial tack, especially on Low surface energy plastics.
- High abrasion & chemical resistance.

Construction:

- 32 Micron PVC base
- 20 Microns of Natural Rubber, Solvent Adhesive
- 25 Micron BOPP Laminate with Thermostable Acrylic Adhesive.

CONSTRUCTION

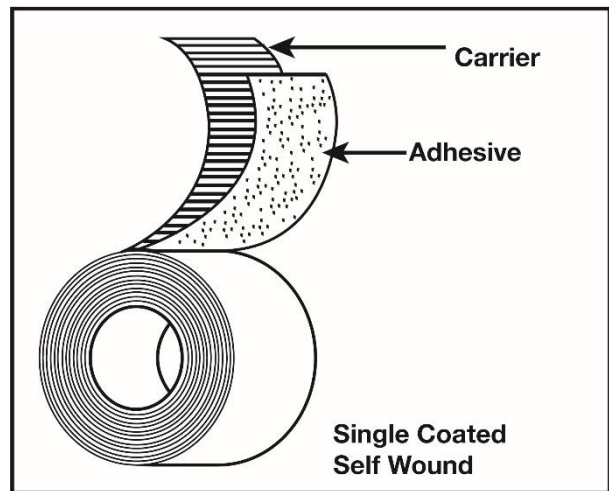

Technical Data

<u>Measure</u>	<u>Unit</u>	<u>Result & Tolerance</u>
Carrier Thickness	Microns	74 +/- 5%
Adhesive weight	GSM	18 +/- 5%
Total thickness	Microns	93 +/- 5%
Peel adhesion (Afera 5001) Steel	Newtons/25mm	3.5 +/- 5%
Elongation (Afera 5004)	%	<4
Service Temperature	Tape can withstand	18-85c
Application Temperature	At the point of application	>+18c

Additional information

Tape performance is guaranteed for the first 6 months. Product must be stored at ambient temperature (Between 18c-23c), in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the batch identification number printed on the box. For optimum performance stock should be rotated and used within 12 months. The tapes have adhesive that are pressure sensitive so must be properly applied to ensure the best performance.

Physical and performance characteristics shown above are obtained following tests recommended by AFERA and PSTC. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.